


3.5 Inch IPS TFT LCD Module High Brightness Landscape With 16 / 18 / 24 Bit RGB Interface

Our Product Introduction

for more products please visit us on lcdtftscreen.com

Basic Information

- Place of Origin: China
- Brand Name: BBI
- Certification: ISO90001 RoHS
- Minimum Order Quantity: 1000
- Price: 0.7-7USD
- Packaging Details: CARTON
- Delivery Time: 3-47WEEKS
- Payment Terms: T/T
- Supply Ability: 100000/MONTH

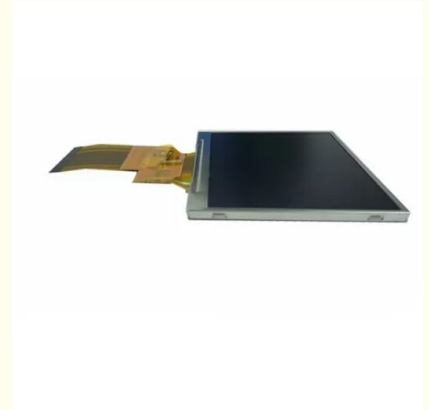

Product Specification

- Port: Shenzhen
- Application: Industrial, Medical And Smart Products
- Type: TFT, TFT LCD
- Interface Type: RGB
- Luminance: 200cd/
- Backlight Type: LED
- Highlight: **3.5 inch IPS TFT LCD module ,
high brightness TFT LCD display ,
RGB interface LCD module**



Product Description


3.5 Inch IPS TFT LCD Module High Brightness Landscape With 16 / 18 / 24 Bit RGB Interface


Product Details

Resolution:	320 * 240 Dots
Size:	3.5 Inch
Viewing Direction:	6 O ' Clock
TFT Mode:	TFT, Transmissive
Outline Size:	76.90 Mm * 63.90 Mm * 4.3 Mm
Brightness:	200Cd / M2

Product Description



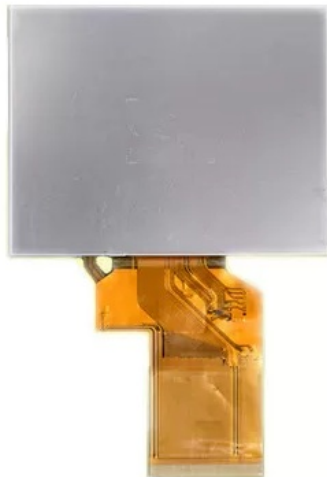


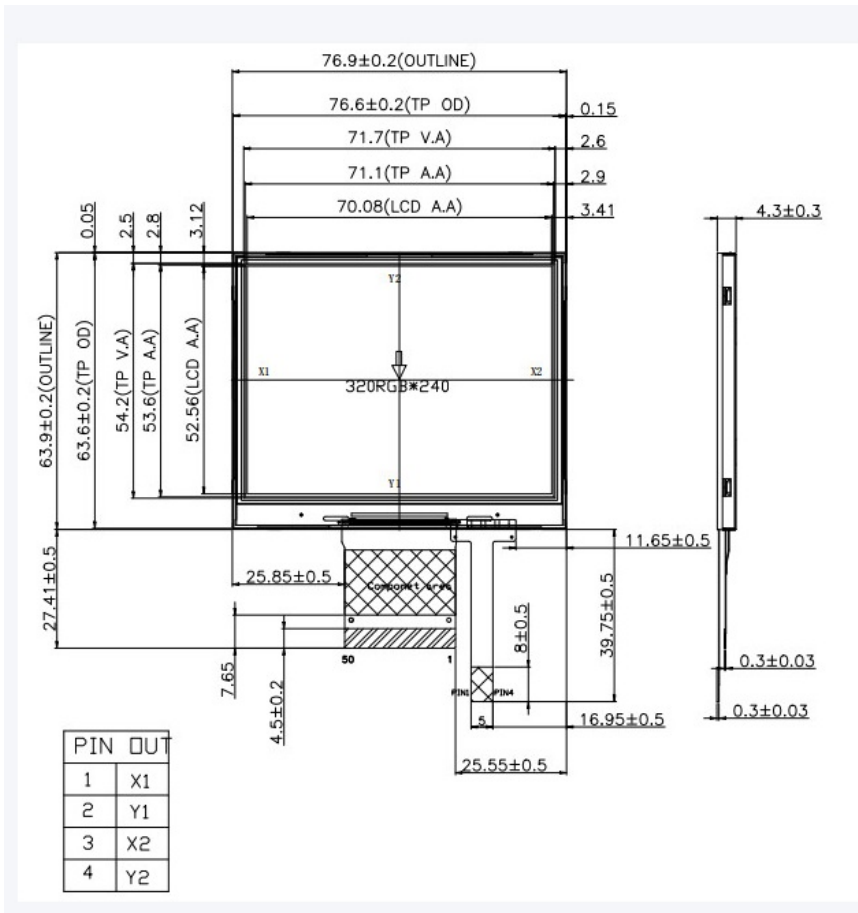







Item	Contents	Description
1	Product Name	3.5 Inch 320 * 240 Dot Tft Lcd Display Module
2	Module Size	76.90 mm * 63.90 mm * 4.3 mm T
3	Resolution	320 x (RGB) x 240
4	Touch	Resistive TP
5	Light Source	6 - DIES WHITE LED
6	Interface Type	18BIT RGB + SPI
7	Colors	262K
8	Controller / Driver	SSD2119





TFT Display

Picture	Diagonal Screen Size	Color type	Model number	Resolutions	Color	Outline dimension	Active area (mm)	Pitch size (mm)	Driver IC	Interface	Operating temperature	Storage Temperature	Pins	With Touch	Remark
	0.96	Full color	UN096-1	80x160	262K	13.74x28.14x1.53	10.8x21.7	0.135x0.1356	ST7735S	4 SPI	-20°C~70°C	-30°C~80°C	13P	No	IPS
	1.14	Full color	UN114-01	135x240	262K	17.6x31.0x1.6	14.864x24.912	0.1101x0.1038	ST7789V	4-wire SPI	-20°C~70°C	-30°C~80°C	13P	No	TN
	1.3	Full color	UN013-01	240x240	262K	26.16x29.22 x1.5	23.4x23.4	0.0975x0.0975	ST7789WW	4 Line SPI	-20°C~70°C	-30°C~80°C	12P	No	IPS
	1.44	Full color	UN144-01	128X128	65K	29x34.41x2.25	25.5x 26.5	0.198x0.198	ST7735S	SPI	-20°~60°	-30°~70°	10P	No	TN
	1.44	Full color	UN144-02	128X128	65K	29.50x36.50x2.25	25.5x 26.5	0.2x0.2	ST7735S	SPI	-10°~60°	-20°~70°	14P	No	TN
	1.77	Full color	UN177-01	128X160	262K	34x43.7x2.6	28.03x35.04	0.219x0.219	ST7735S	SPI	-20~+70°C	-30~+80°C	14P	No	TN
		Full color	UN177-02	128X160	262K	34x42.94x2.3	28.03x35.04	0.219x0.219	ST7735S	SPI	-20~+70°C	-30~+80°C	10P	No	TN

	1.8	Full color	UN18NT	128x160	262K	34x46.7x2.3	28.03x35.04	-	ST7735S	SPI	-20~+70°C	-30~+80°C	18P	No	TN
		Full color	UN18T-C2	128x160	262K	34x45.83x3.65	28.03x35.04	-	ST7735S	SPI	-20~+70°C	-30~+80°C	24P	Yes/No	TN
		Full color	UN18T	128x160	262K	34x45.83x2.4	28.03x35.04	-	ST7735S	SPI	-20~+70°C	-30~+80°C	14P	Yes/No	TN
		Full color	UN188NT-M	128x160	262K	34x46.7x2.3	28.03x35.04	-	IL9163C/ ST7735S	MCU8080	-20~+70°C	-30~+80°C	20P	No	TN
	2	Full color	UN020-01	240x320	262K	35.7x51.2x2.2	30.6x40.8	0.1275x0.1275	ST7789VW	SPI	-20~70°C	-30~80°C	12P	No	IPS
	2.4	Full color	UN024-02T	240x320	262K	42.72x60.26x3.75	36.72x48.96	0.153x0.153	IL9341/ ST7789V	SPI	-20~70°C	-30~80°C	18P	Yes/No	TN
		Full color	UN024-02	240x320	262K	42.72x60.26x2.30	36.72x48.96	0.153x0.153	IL9341V	SPI	-20~70°C	-30~80°C	18P	No	TN
		Full color	UN024-03T	240x320	262K	42.72x60.26x3.75	36.72x48.96	0.153x0.153	IL9341/ ST7789V	SPI	-20~70°C	-30~80°C	37P	Yes/No	TN
		Full color	UN024-04T	240x320	262K	42.72x60.26x3.75	36.72x48.96	0.153x0.153	IL9341/ ST7789V	MCU Parallel 8080 MCU Serial SPI	-20~70°C	-30~80°C	40P	Yes/No	TN
	2.8	Full color	UN028-02	240x320	262K	50.0x69.20x3.60	43.20x57.60	0.180x0.180	IL9341	SPI	-20~70°C	-30~80°C	18P	No	TN
		Full color	UN028-03T	240x320	262K	50.0x69.20x3.80	43.20x57.60	0.180x0.180	IL9341/ ST7789V	SPI	-20~70°C	-30~80°C	40P	Yes/No	TN
		Full color	UN028-04T	240x320	262K	50.0x69.20x3.80	43.20x57.60	0.180x0.180	ST7789V	SPI	-20~70°C	-30~80°C	18P	Yes/No	TN
	3.2	Full color	UN032-1	240x320	262K	54x77.4x3.75	48.6x64.8	0.153x0.153	IL9341/ ST7789V	SPI	-20~70°C	-30~80°C	18P	Yes/No	TN



Dongguan Bibuke Electronic Technology Co., Ltd.



+8613711912723



Jack@smartwinlcd.cn



lcdftscreen.com

Shangyu Commercial Centre Chang'an, Dongguan, Guangdong, China 523881