


## 960x240 Pixels 2.7 Inch Lcd Display Colors 262K Small TFT Display

Our Product Introduction


### Basic Information

- Place of Origin: China
- Brand Name: BBI
- Certification: ISO90001 RoHS
- Minimum Order Quantity: 1000
- Price: 0.7-7USD
- Packaging Details: CARTON
- Delivery Time: 3-47WEEKS
- Payment Terms: T/T
- Supply Ability: 100000/MONTH

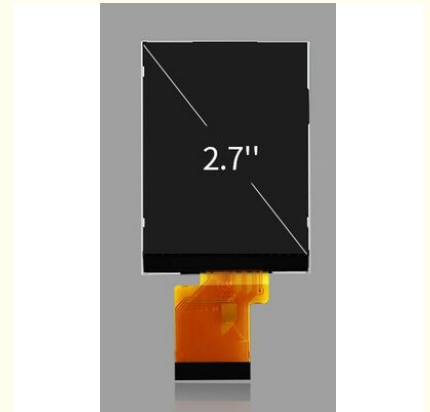

### Product Specification

- Luminance: 230 Cd/m<sup>2</sup>
- Backlight Technology: LED
- Operating Temperature: -20~+70
- Backlight: White LED
- Resolution: 960\*240
- Connectivity: RGB
- Display Type: TFT
- Pins Number: 40PINS
- Highlight: 2.7 inch TFT LCD display ,  
960x240 pixels small TFT screen,  
262K colors LCD display

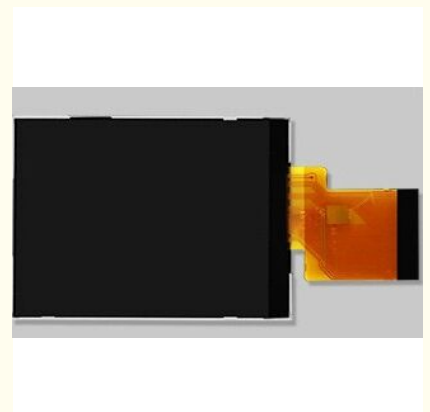

for more products please visit us on [lcdtftscreen.com](http://lcdtftscreen.com)

## Product Description


### 960x240 Pixels 2.7 Inch Lcd Display Colors 262K Small TFT Display


#### Product Details

Product Name:	TFT Display
Size (inch):	2.7
Resolution:	960*240
Brightness	280
Interface:	RGB 8bit
Driver Ic:	ILI8191

#### Product Description

Screen Size	2.7 inch
Number of Pixel	960RGB(H)x240(V)
Display area	40.50(H)x54.00(V)mm
Pixel pitch	0.05625(H)x0.16875(V)mm
Pins	40 pins
Outline Dimension	46.20x63.10x2.38mm
Pixel arrangement	RGB Vertical Stripe
Display mode	Normally White
Viewing Direction(eye)	6 O'CLOCK
Display Color	262K
Luminance(cd/m <sup>2</sup> )	230 nit
Contrast Ratio	600:01:00
Interface	RGB 8bit
Back-light	LED Side-light type
Drive IC	ILI8961
Operation Temperature	-30~80
Storage Temperature	-30~80

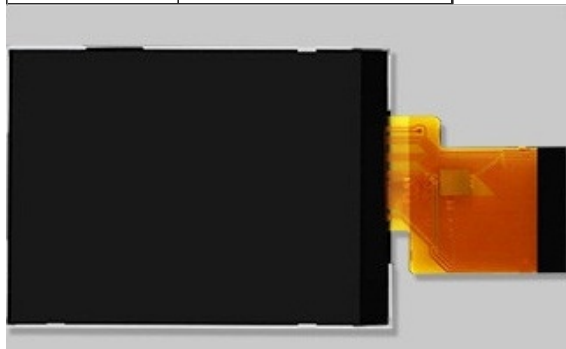

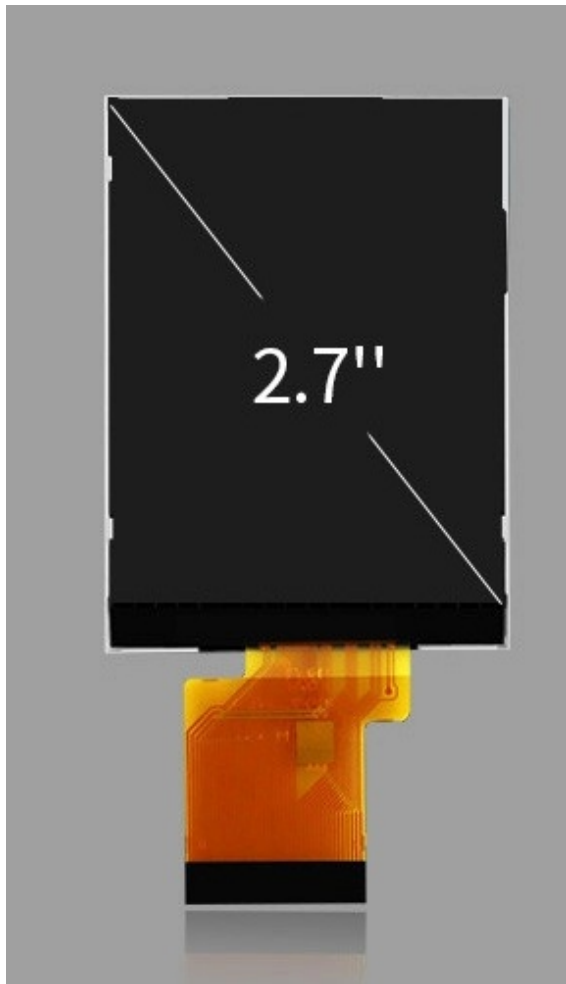

型号	LCD Size 液晶面板尺寸	Panel Type 面板类型	Resolution 分辨率	Viewing Direction 使用视角	Luminance 亮度	Driver IC 驱动芯片	Display Mode 显示模式	Interface 接口方式	Module Size 模块尺寸	Panel Active Area 可视区域	Number of Color	Pixel Pitch 像素尺寸	Pixel Arrangement 像素排列	Weight 重量	Light Source 光源	Operating Temperature	Storage Temperature
TP1013P030	1.77"	TS	1280x800	6 o'clock	300	LC9036	Normally White	MCU SPI	24.70x48.70(x1)x2.20(z)	20.82x32.04	65c	0.219x0.219	RGB Vertical stripe	780	2 white LED	-20°~70	-30°~80
TP14 0	2.91"	DS	480x800	ALL	300	LC9037C	Normally Black	MIPI	35.44(x)49.17(x1)x2.13(z)	31.84x36.40	16.7M	0.286x0.286	RGB-stripe	780	0 LED	-20°~70	-30°~80
TP1013P051	1.5"	DS	240x320	ALL	-	8T7709	Normally Black	SPi	8.18(x)12.22(x1)x1.92(z)	23.4x23.4	262K	0.097(x) x 0.097(y)	RGB Vertical stripe	780	2 LED Light	-20°~70	-30°~80
TP1013P030	1.77"	TS	1280x800	12 o'clock	300	8T7720	Normally White	Serial Interface	23.2(x)42.9(x1)x2.2(x)	23.02x32.04	262K	0.219x0.219	RGB-stripe	780	2 white LED	-20°~70	-30°~80
TP1024B051-V2	2.4"	DS	240x320	Free	220	8P2020A	Normally Black	Line serial interface	22.9(x)40.28(x1)x2.40(z)	26.72x40.90	262K	0.152x0.152	RGB-stripe	780	4 white LED	-20°~70	-30°~80
TP1024B034	2.4"	TS	240x320	12 o'clock	400	119040C	Normally White	MCU SPI	30.72(x)46.28(x1)x2.2(x)	26.72x40.90	65c	0.264(x) x 0.264(y)	RGB Vertical stripe	780	4 white LED	-20°~70	-30°~80
TP1024P033	2.4"	TS	240x320	12 o'clock	250	8T7709V	Normally White	Line serial interface	22.9(x)40.28(x1)x2.20(z)	26.72x40.90	262K	0.152x0.152	RGB-stripe	780	4 white LED	-20°~70	-30°~80
TP1024P099	2.4"	TS	240x320	12 o'clock	300	8T7709V2	Normally Black	SPi	2.72(x)40.28 (y1)x2.20(z)	26.72x40.90	262K		RGB-stripe	780	4 LED	-20°~70	-30°~80
TP1024B030	2.91"	DS	480x800	ALL	300	6C9020V	Normally Black	MIPI/RGB	2.78(x)47.47 (y1)x2.13(z)	26.72x47.70	16.7M	23.947x0.44	RGB-stripe	780	3 LED	-20°~70	-30°~80
TP1022	3.2"	TS	240x320	8 o'clock	400	8T7720W	Normally White	MIPI SL	32.80(x)47.07(x1)x2.20(z)	47.88x43.84	262K	0.199(x) x 0.199(y)	RGB	780	6 LED	-20°~70	-30°~80
TP1022B030	3.2"	TS	240x320	8 o'clock	400	8T7720W	Normally White	MIPI SL	32.80(x)47.07(x1)x2.20(z)	47.88x43.84	262K	0.199(x) x 0.199(y)	RGB	780	6 LED	-20°~70	-30°~80
TP1040B019	2.91"	DS	480x800	ALL	300	6C9020V	Normally Black	MIPI	35.44(x)49.17(x1)x2.13(z)	31.84x36.40	16.7M	0.286x0.286	RGB-stripe	780	0 LED	-20°~70	-30°~80
TP1040B005	4.3"	DS	480x800	ALL	250	8P2047	Normally Black	RGB DABIT	7.28(x)43.51(x1)x2.87(z)	35.94x53.90	16.7M	0.199x0.199	RGB-stripe	780	10 LED Light	-20°~70	-30°~80
TP1043B7005	4.3"	DS	480x800	ALL	300	8P2047	Normally Black	RGB DABIT	7.28(x)43.51(x1)x4.10(z)	35.94x53.90	16.7M	0.199x0.199	RGB-stripe	780	10 LED Light	-20°~70	-30°~80
TP1022B051	7"	TS	800x480	8 o'clock	300	18024 14827	Normally White	RGB	44.80(x)100.07(x1)x4.0(z)	39.84(x)45.43(y)	16.7M	0.441(x) x 0.134(y)	RGB Vertical stripe	780	7 LED Light	-20°~70	-30°~80
TP1138B7003	1.38"	DS	240x320	ALL	250	8P2020A	Normally Black	SPi	37.54x39.12x1.65mm	33.14	262K	48.0(x) x 3x146.4(y)	RGB Vertical Stripe	780	3-LED Light	-20°~70	-30°~80

TP10049322	2.4"	TS	240Wx320	12 0'clock	330	81778P	Normally White	Line	active	Interfac	2.72(1)Wx3.25(1)Hx2.23(1)D	26.72x48.96	282K	0.135x0.133	RGB-entire	TRD	4 white LED	-20°~70	-30°~80
TP10028615-r1	2.0"	DS	240Wx320	FRON	400	81778P	Normally Black	MTU	None	2.72(1)Wx3.25(1)Hx2.23(1)D	43.2x57.3	282K	0.06x0.18	RGB	TRD	4 white LED	-20°~70	-30°~80	
TP10028637	2.0"	DS	240Wx320	FRON	300	81778P	Normally Black	MTU	None	4.9(1)Wx6.1(1)Hx2.4(1)D	43.2x57.6	282K	0.06x0.18	RGB	TRD	4 white LED	-20°~70	-30°~80	
TP10028694	2.0"	DS	240Wx320	W/L	400	81778P2	Normally Black	RGB	None	30.9(1)Wx9.20(1)Hx2.4(1)D	43.2x57.6	282K	0.185x0.188	RGB	TRD	6 white LED	-20°~70	-30°~80	
TP10028675	2.0"	DS	450Wx640	FRON	300	8177810	Normally Black	4-SP1-RGB	None	3.99(1)Wx9.20(1)Hx2.15(1)D	43.2x57.6	282K	0.08x0.39	RGB	TRD	4 white LED	-20°~70	-30°~80	
TP10028903	2.0"	TS	240Wx320	12 0'clock	200	81778P	Normally White	MTU	3000	3.9(1)Wx9.2(1)Hx2.45(1)D	43.2x57.6	282K	0.06x0.18	RGB	TRD	4-LED Light	-20°~70	-30°~80	
TP10028914	2.0"	TS	240Wx320	12 0'clock		81778P	Normally White	MTU	3000	3.9(1)Wx9.2(1)Hx2.45(1)D	43.2x57.6	282K	0.06x0.18	RGB	TRD	4 white LED	-20°~70	-30°~80	
TP10028938	2.0"	TS	240Wx320	8 0'clock	400	81778M	Normally White	MTU	2L	32.88(1)Wx15.6(1)Hx2.50(1)D	47.88x63.84	282K	0.1895x0.1895	RGB	TRD	6 LED	-20°~70	-30°~80	
TP10028991	3.14"	TS	240Wx320	12 0'clock	300	81778P	Normally White	MTU	18000	3.2(1)Wx12.9(1)Hx2.55(1)D	47.88x63.84	282K	0.0895x0.1895	RGB	TRD	6 white LED	-20°~70	-30°~80	
TP10028996	2.5"	TS	320Wx480	12 0'clock	200	IL19488	Normally White	MTU	8000	1.88(1)Wx3.16(1)Hx2.43(1)D	48.96x73.44	282K	0.135x0.133	RGB-entire	TRD	6-LED Light	-20°~70	-30°~80	
TP10028997	2.5"	TS	320Wx480	8 0'clock	200	818025-3	Normally White	MTU	2600	7.8(1)Wx3.85(1)Hx2.9(1)D	48.96x73.44	282K	0.072(1) x 0.219(1)	RGB-entire	TRD	6 LED	-20°~70	-30°~80	
TP10049091	2.87"	TS	450Wx630	W/L	300	IL19008-20	Normally White	MTU	0-81	37.14(1)Wx16.52(1)Hx2.4(1)D	51.96x55.4	282K	0.108x0.108	RGB-entire	TRD	6 white LED	-20°~70	-30°~80	
TP10428995	4.3"	DS	450Wx630	W/L	300	TP1047	Normally Black	MTU	2400	7.53(1)Wx10.5(1)Hx2.97(1)D	92.04x113.88	16.7W	0.186x0.188	RGB-entire	TRD	10 LED Light	-20°~70	-30°~80	
TP10428998	4.3"	TS	450Wx630	8 0'clock	300	81778P	Normally White	MTU	2400	37.28(1)Wx16.5(1)Hx2.1(1)D	92.04x113.88	16.7W	0.186x0.188	RGB-entire	TRD	10 LED Light	-20°~70	-30°~80	
TP10708903	1"	TS	90Wx165	8 0'clock	300	168041HEX79	Normally White	None	None	34.90(1)Wx10.6(1)Hx5.9(1)D	35.84(1)Wx65.85(1)H	16.7W	0.641(1) x 0.1784(1)	RGB	Vertical strip	TRD	7 LED Light	-20°~70	-30°~80
TP10968920	0.96"	DS	90Wx165	FRON	400	8177350	Normally Black	4-SP1	None	4.94(1)Wx7.94(1)Hx1.93(1)D	19.84x21.7	282K	0.135x0.135	RGB-entire	TRD	4 white LED	-20°~70	-30°~80	



**Dongguan Bibuke Electronic Technology Co., Ltd.**



+8613711912723



Jack@smartwinlcd.cn



lcdtftscreen.com

Shangyu Commercial Centre Chang'an, Dongguan, Guangdong, China 523881