


HT1621 7 Segment LCD Display UPS LCD Display HTN Blue White LED Backlight

Basic Information

- Place of Origin: China
- Brand Name: BBI
- Certification: ISO9001 RoHS
- Minimum Order Quantity: 1000
- Price: 0.78-7USD
- Packaging Details: CARTON
- Delivery Time: 3-4WEEKS
- Payment Terms: T/T
- Supply Ability: 300000/MONTH

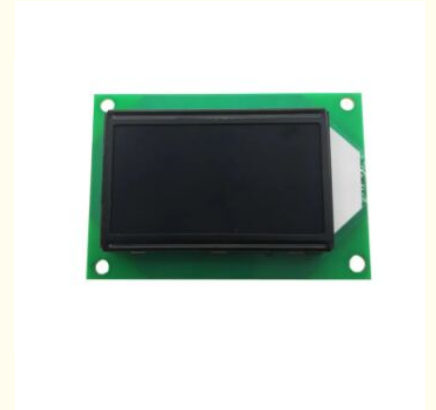

Product Specification

- Storage: -10 To 60
- Viewing Angle: 120'clock
- Driver Method: 1/4 Duty, 1/3 Bias
- Working: 0 To 50
- Customized: Customized
- Transport Package: Carton/Pallet
- Display Mode: TN, Positive
- Working Supply: 3.3v
- Highlight: HT1621 7 segment LCD display ,
UPS LCD display with LED backlight,
HTN blue white LCD display



Product Description

HT1621 7 Segment LCD Display UPS LCD Display HTN Blue White LED Backlight

Detail Information

LCD Type:	HTN, Negative
Viewing Angle:	12 O'clock
Operating Temperature:	0~+50
Voltage:	3.3V
Backlight:	White
Driver IC:	HT1621

Product Description

7 Segment LCD Display HTN Blue White LED Backlight for UPS Power

An HTN Segment LCD offers **superior contrast**, **better-viewing angles**, and **improved legibility** compared to **TN segment LCDs**, making it an excellent choice for **simple alphanumeric displays** in applications where **clarity** and **readability** are crucial.

Its **low power consumption** and **cost-effectiveness** make it ideal for **battery-operated devices** like **clocks**, **calculators**, **home appliances**, and **industrial meters**.

While HTN segment LCDs are typically **monochrome** or **two-color** displays and lack the vibrancy of technologies like **OLED** or **IPS**, they are well-suited for applications that require **simple static information** to be displayed clearly and efficiently.

Detailed Parameters:

Module Size	73.2(W)* 50(H)* 17.2(T) mm	Display mode	HTN, negative
LCD viewing area	51.7(W)* 27.5(H) mm	Polarizer type	Transmissive
Driver IC	HT1621	LED backlight	White, 2 pcs
Drive method	1/4 Duty, 1/3 Bias	Working voltage	3.3V
Viewing angle	12 O'clock	Connection Way	Rubber strips
Operate temperature	0 ~+50	Storage temperature	-10~+60



Product Applications (1)



Product Applications (2)



LINYANG
Electricity Meter



HND
Electricity Meter



JINKA
Gas Meter



Dongguan Bibuke Electronic Technology Co., Ltd.



+8613711912723



Jack@smartwinlcd.cn



lcdtftscreen.com

Shangyu Commercial Centre Chang'an, Dongguan, Guangdong, China 523881