




White Backlight 14 Segment LCD Display Screen Blue Background HTN LCD Display

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: BBI
- Certification: ISO90001 RoHS
- Model Number: BBI-001
- Minimum Order Quantity: 1000
- Price: 0.7-7USD
- Packaging Details: CARTON
- Delivery Time: 3-47WEEKS
- Payment Terms: T/T
- Supply Ability: 100000/MONTH

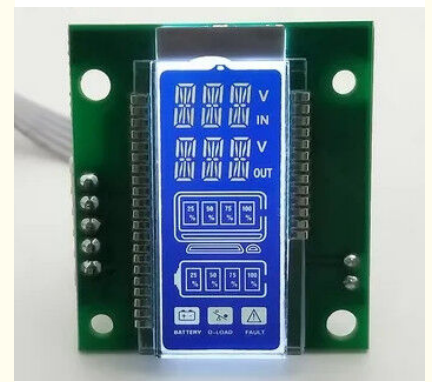

Product Specification

- Name: 14 Segment LCD Display
- Driver Ic: HT1621
- Viewing Angle: 120 Degrees
- Working Voltage: 5.0V
- Interface Type: Parallel
- Working Supply: 5.0V
- Drive Voltage: 3.3V
- Connector: PIN, Both Sides
- View Angle Direction: 6 O'clock
- Highlight: **White Backlight 14 Segment LCD Display, 14 Segment LCD Display Screen, Blue Background HTN LCD Display**



for more products please visit us on lcdftscreen.com

Product Description

RoHS 14 Segment LCD Display HTN Blue Background White Backlight SMT_HT1621

Product Description

14 Segment Display LCD HTN Blue Background White Backlight SMT_HT1621

Applications of HTN LCD Displays:

HTN LCDs are commonly used in applications where **simple numeric or alphanumeric displays** are needed with **clear readability**, **good contrast**, and **wide viewing angles**. Some typical applications include:

Digital Clocks:

- **HTN displays** are ideal for **digital clocks**, as they provide **clear time readouts** with **good contrast** and **legibility** in various lighting conditions.
-

Consumer Electronics:

- Used in **calculators**, **appliances**, and **kitchen devices** for **clear numeric displays** and **easy-to-read information**.
-

Industrial and Medical Devices:

- **HTN LCDs** are used in **gauges**, **thermometers**, **blood pressure monitors**, and **other measurement tools** that require **simple, easy-to-read numeric or alphanumeric information**.
-

Automotive Displays:

- Often found in **vehicle dashboards** and **instrument clusters** to display information like **speed**, **fuel levels**, and **engine diagnostics** in **clear, readable text**.
-

Portable Devices:

- **HTN LCDs** are well-suited for **portable devices** like **watches** and **small handheld meters** where **low power consumption** and **clear text or numeric display** are essential.

Detailed Parameters:

Model Description	14 Segment LCD Display	LCD type	Segmented Display
Module Size	34(W)* 37.65(H)* 14(T) mm	Display mode	HTN, Negative
LCD viewing area	13(W)* 31.3(H) mm	Polarizer type	Transmissive
Driver IC	SMT_HT1621	LED backlight	White, 2pcs, 30mA
Drive method	1/4 Duty, 1/3 Bias	Working voltage	5.0V
Viewing angle	12 O'clock	Connection Way	COB+PIN
Operate temperature	-20 ~+70	Storage temperature	-30~+80



Dongguan Bibuke Electronic Technology Co., Ltd.



+8613711912723



Jack@smartwinlcd.cn



lcdtftscreen.com

Shangyu Commercial Centre Chang'an, Dongguan, Guangdong, China 523881